


Rasland®

INSTALLATION GUIDE RA SQ-RAIN2022 MANUAL RA SQ-RAIN2022-2022-01

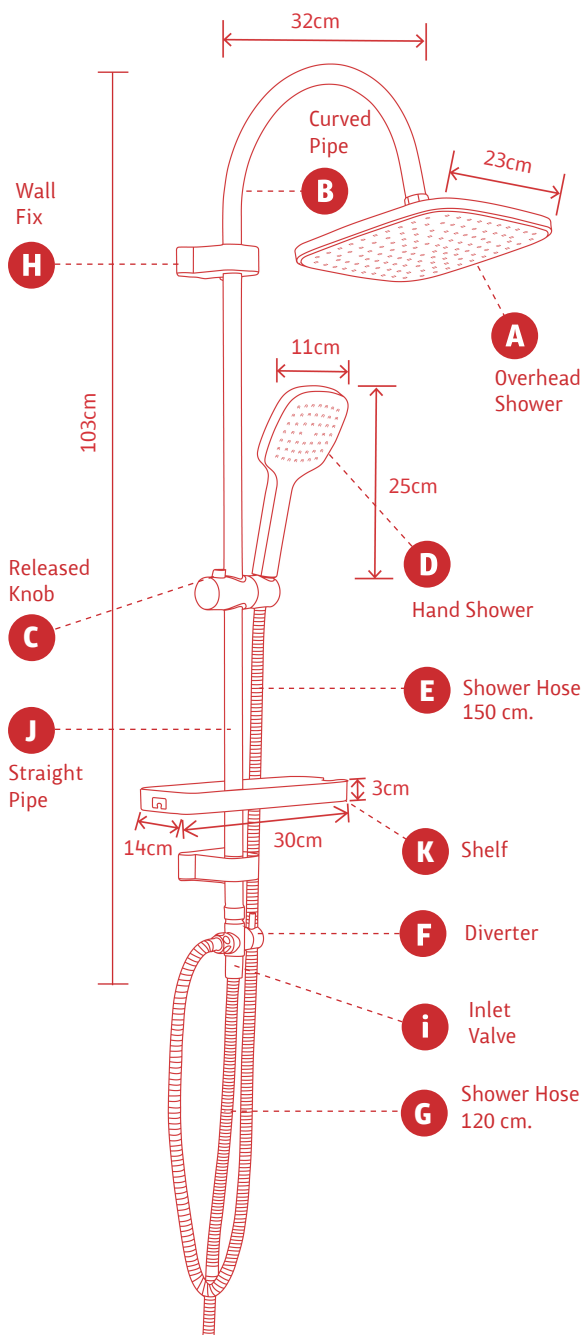

Run water through the in-wall-pipe before installing products
highly recommend for the new bathroom that has never been used before

1. Run water through the in-wall-pipe by opening the water valve and let water runs out from the pipe before installing any parts of products to the pipe. Please use any containers to block the water splash from the pipe during the run through. This process is highly recommended in order to wash out the deposit or any sands in the water pipe so that it will not cause damage to the products.
2. Run through process would take around 30 seconds by opening the valve all the way open so that the flow will bring out all the deposits out from the in-wall-pipe.
3. Close the main valve and then follow the installation guide below.

Installation guide

1. Install straight pipe (J) to the upper side angle of the diverter (F) by putting an o-ring between the angle to prevent water leakage and put the inlet valve (i) to the lower side angle of the diverter.
2. Measure the height at the position that the fixing (H) and (i) in order to drill holes on the wall.
3. Drill holes on the wall. **(Please be careful of the water pipe inside the wall that the screws are not supposed to cause any damage to the in-wall-pipe.)**
4. Screw to fix the fixing set
5. Put the shelf(K) into the straight pipe(J). Put the curved pipe(B) into the straight pipe while putting the pipe the released knob (B) must be turned until the very loose end. The users can indicate by himself.
6. Turn the released knob to make sure that the curved pipe is already fixed and tight at the satisfied height.
7. Put the shower hose (E) by putting the shorter nut with the diverter and the longer nut with hand shower (D). Make sure that the o-ring is also put between the angle in order to prevent water leakage.
8. Hang the hand shower with sliding hook on the straight pipe.
9. Put the overhead shower(A) with the curved pipe by putting an o-ring in between the angle to prevent water leakage.
10. Put the shower hose (G) by putting the shorter nut with the low-end of the pipe and the other and of the hose to outlet of the Water heater unit.
11. Turn on the water valve and enjoy the Shower Rain.

Clean guide and maintenance

1. Do not use acid chemical to clean the products because it will ruin the surface of the chrome plated.
2. Do not use rough surface material to rub or clean the product. Soft material is highly recommended.
3. Use dish washing chemical mix with some amount of water to shine the poroduct.
4. In the case that the deposit blocks holes on the overhead shower or hand shower, the deposit can easily be removed by turning on the water and rub on the rubber head.
5. Do not adjust the height of the sliding hook by pulling the shower hose but use hold the button on the hook while sliding hook up and down.

Guarantee conditions

1. The warranty is only for the leakage of the water valve only (diverter). The period is counted from the date of purchase for 10 years.
2. The warranty is not effective if the leakage caused by mis-installing or deposit or lime that caused by water condition.
3. The company will be responsible the damage that is not exceed the price of the product and will not be responsible other things other than the product itself.
4. In order to claim the warranty, the sales receipt must be presented otherwise the company has the right to refuse the claim.

1. สินค้ารับประกันเฉพาะน้ำรั่วซึม ที่ว่าส่วเปิด ปิดน้ำ เท่านั้น โดยรับประกันน้ำไม่รั่วซึม เป็นเวลา 5 ปี
2. การรับประกัน ไม่รับประกันในกรณีที่เกิดการซึมของน้ำเกิดจาก การติดตั้งผิดวิธี อันเป็นการทำลาย ใส่ในขงเวลาแล้ว หรือสิ่งแปลกปลอมอุดตันภายใน หรืออุดตันจากตะกอนน้ำ หรือ สภาพน้ำที่ไม่สะอาด
3. การรับประกัน ทางบริษัทฯ จะรับผิดชอบไม่เกินมูลค่าของสินค้า โดยไม่รับผิดชอบความเสียหายอื่นๆ นอกเหนือจากตัวสินค้า
4. ในการเคลมสินค้า ต้องแสดงใบเสร็จ ในการซื้อเป็นสำคัญ มิฉะนั้นทางบริษัทฯ สงวนสิทธิ์ในการไม่เคลมสินค้า